
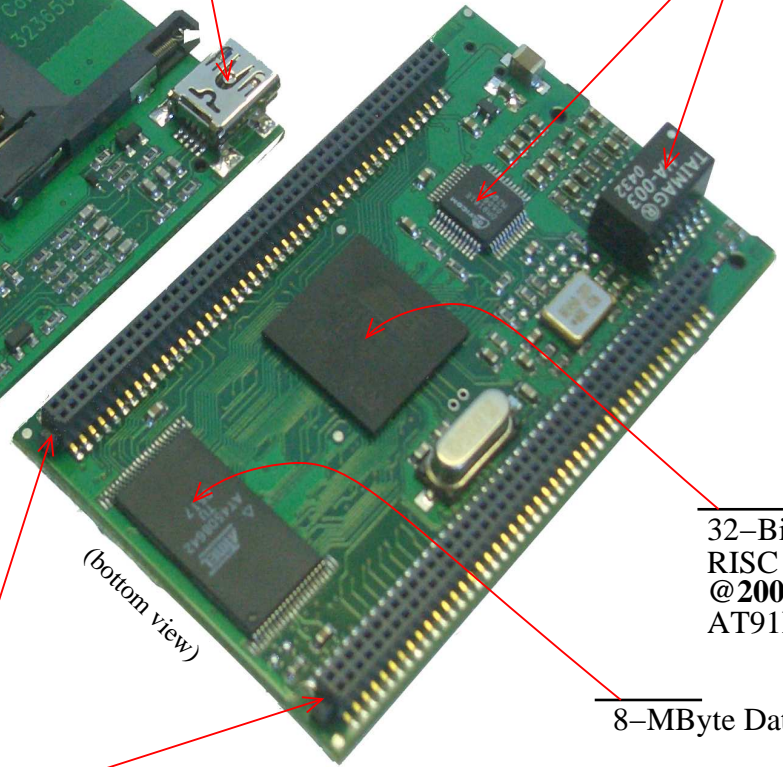


SD-Card Interface

USB-2.0 Client Interface

10 / 100 Mbps Ethernet
all you need: is onboard

Up to 128MByte RAM

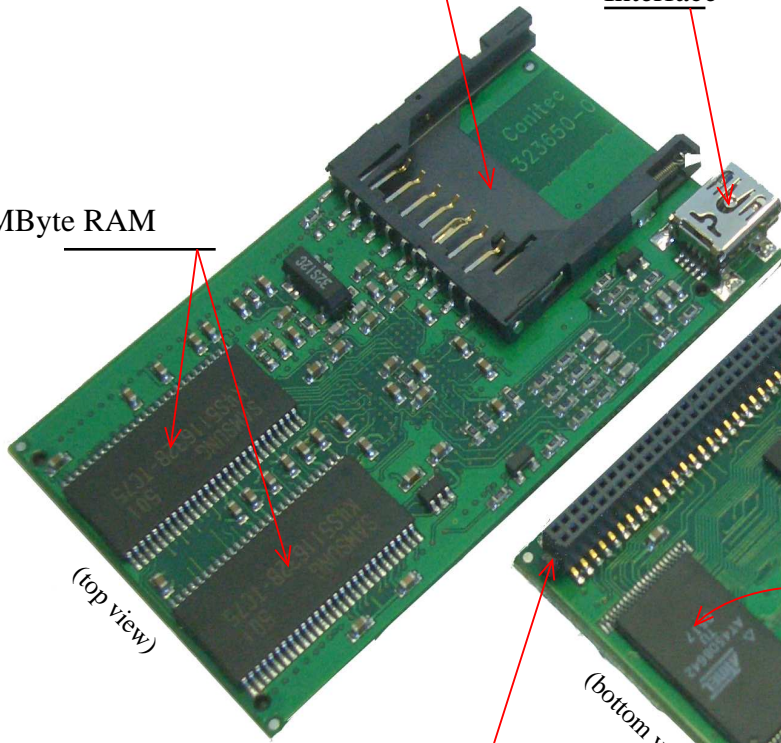

32-Bit RISC MCU @200MIPS AT91RM9200

8-MByte DataFlash

2x90 Pins containing

- Up to 66 GPIOs
- Full databus and address lines
- SPI, UART, Timers, ...
- 2x USB-Host
- Ethernet lines